



PACKAGE HIGHLIGHTS

- REV-XP™ platform
- Multi-function digital gauge display with **temperature gauge**
- **Painted tunnel**
- **More comfortable REV-XP seat**
- SC™-5 rear suspension
- Variable Rate HPG™ rear shock
- Lightweight 1.25-inch lug RipSaw⁺ track
- Dual A-arm front suspension
- Pilot™ 5.7 skis
- Brembo brake with braided stainless-steel brake line
- Aluminum handlebar with integrated J-hooks
- Electric start
- RER electronic reverse
- 12V power outlet
- Heated visor power outlet
- Mirrors
- GSX expandable tunnel bag

NEW features for 2013

ENGINE CHOICE

Engine	Rotax® E-TEC® 600 H.O.
Engine details	Liquid-cooled, 3-D R.A.V.E.™
Cylinders	2
Displacement	594.4 cc / 36.3 in ³
Bore	72 mm / 2.8 in
Stroke	73 mm / 2.9 in
Maximum engine speed	8100 RPM
Carburation	Electronic Direct Injection
Recommended fuel type	Premium unleaded
Minimum octane	91
Fuel tank	40 liters / 10.6 gallons
Oil tank capacity	3.7 liters / 3.9 quarts

POWERTRAIN

Drive clutch type	TRA™ III
Driven clutch type	QRS
Engagement	3400 RPM
Small sprocket number of teeth	25
Large sprocket number of teeth	45
Drive sprocket number of teeth	8
Drive sprocket diameter	183 mm / 7.2 in
Brake system	Brembo brake with stainless-steel braided brake line

DRY WEIGHT

204 kg / 450 lb

COLOR CHOICE

White / Black

DIMENSIONS


Vehicle overall length	2905 mm / 114.4 in
Vehicle overall width	1217 mm / 47.9 in
Vehicle overall height	1200 mm / 47.2 in
Ski stance	1077 mm / 42.4 in
Ski overall length	1066 mm / 42 in
Track nominal width	381 mm / 15 in
Track nominal length	3051 mm / 120 in
Track profile height	31.8 mm / 1.25 in RipSaw

SUSPENSION

Front suspension	Dual A-arms
Front shock	HPG
Front suspension max. travel	229 mm / 9 in
Rear suspension	SC-5
Center shock	Motion Control
Rear shock	Variable Rate HPG
Rear suspension max. travel	381 mm / 15 in

FEATURES

Frame	REV-XP	Electric start	Standard	Windshield	375 mm / 15 in
Skis	Pilot 5.7	Reverse	RER	Carbide runner	Standard
Seating	REV-XP	Heated throttle lever	Standard	Carbide configuration	102 mm / 4 in square type at 90°
Handlebar	Aluminum with J-hooks / Steering cover	Heated grips	Standard	Hitch	Optional
Riser block height	115 mm / 4.5 in	Gauge	Multi-function		
		Mirrors	Standard		

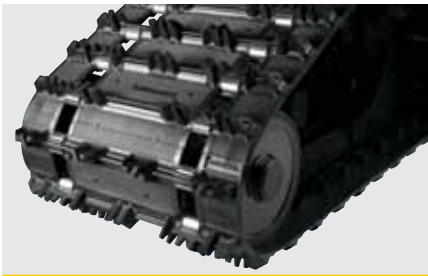


1.25" RipSaw track

Great traction and supreme trail manners with this lightweight track.



NEW More comfortable REV-XP seat

Sleek, yet comfortable. Includes trunk with 1.9 gal (7 l). Additional 0.75 in. (19 mm) of foam increases rider comfort.

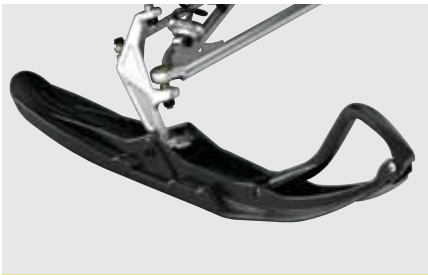

Pilot 5.7 skis

Deliver outstanding bite in corners and virtually no darting.



Multi-function gauge with LCD screen

COLOR AVAILABLE

White / Black

ENGINE CHOICE

E-TEC 600 H.O.

GAUGE FEATURES

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Temperature	Standard

GSX LE



PACKAGE HIGHLIGHTS

- REV-XR™ platform
- **eDrive™ 2 drive clutch**
- Multi-function digital gauge display with **temperature gauge**
- **Painted tunnel**
- **More comfortable REV-XP seat**
- SC™-5 rear suspension
- Variable Rate HPG™ rear shock
- Lightweight 1.25-inch lug RipSaw[‡] track
- Dual A-arm front suspension
- Pilot™ 5.7 skis
- Brembo brake with braided stainless-steel brake line
- Aluminum handlebar with integrated J-hooks
- Electric start
- Electronic push-button reverse
- 12V power outlet
- Heated visor power outlet
- Mirrors
- GSX expandable tunnel bag

NEW features for 2013

ENGINE CHOICE

Engine	Rotax® 4-TEC® 1200
Engine details	Liquid-cooled, four-stroke D.O.H.C., dry sump
Cylinders	3
Displacement	1170.7 cc / 71.4 in ³
Bore	91 mm / 3.6 in
Stroke	60 mm / 2.4 in
Maximum engine speed	7800 RPM
Carburation	EFI
Recommended fuel type	Regular unleaded
Minimum octane	87
Fuel tank	40 liters / 10.6 gallons
Oil tank capacity	3.5 liters / 3.7 quarts

POWERTRAIN

Drive clutch type	eDrive 2
Driven clutch type	QRS
Engagement	2500 RPM
Small sprocket number of teeth	24
Large sprocket number of teeth	43
Drive sprocket number of teeth	8
Drive sprocket diameter	183 mm / 7.2 in
Brake system	Brembo brake with stainless-steel braided brake line

DRY WEIGHT

240 kg / 529 lb

COLOR CHOICE

White / Black

DIMENSIONS

Vehicle overall length	2905 mm / 114.4 in
Vehicle overall width	1217 mm / 47.9 in
Vehicle overall height	1270 mm / 49.3 in
Ski stance	1077 mm / 42.4 in
Ski overall length	1066 mm / 42 in
Track nominal width	381 mm / 15 in
Track nominal length	3051 mm / 120 in
Track profile height	31.8 mm / 1.25 in RipSaw

SUSPENSION

Front suspension	Dual A-arms
Front shock	HPG
Front suspension max. travel	229 mm / 9 in
Rear suspension	SC-5
Center shock	Motion Control
Rear shock	Variable Rate HPG
Rear suspension max. travel	381 mm / 15 in

FEATURES

Frame	REV-XR	Electric start	Standard	Windshield	410 mm / 16 in
Skis	Pilot 5.7	Reverse	Electronic	Carbide runner	Standard
Seating	REV-XP	Heated throttle lever	Standard	Carbide configuration	102 mm / 4 in square type at 90°
Handlebar	Aluminum with J-hooks / Steering cover	Heated grips	Standard	Hitch	Optional
Riser block height	115 mm / 4.5 in	Gauge	Multi-function		
		Mirrors	Standard		



1.25" RipSaw track

Great traction and supreme trail manners with this lightweight track.



NEW More comfortable REV-XP seat

Sleek, yet comfortable. Includes trunk with 1.9 gal (7 l). Additional 0.75 in. (19 mm) of foam increases rider comfort.



NEW eDrive™ 2 drive clutch

More responsive acceleration and long-term durability from this all-new clutch.



Multi-function gauge with LCD screen

COLOR AVAILABLE

White / Black

ENGINE CHOICE

4-TEC 1200

GAUGE FEATURES

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Temperature	Standard

GSX LE